





Explosion Proof Floodlight

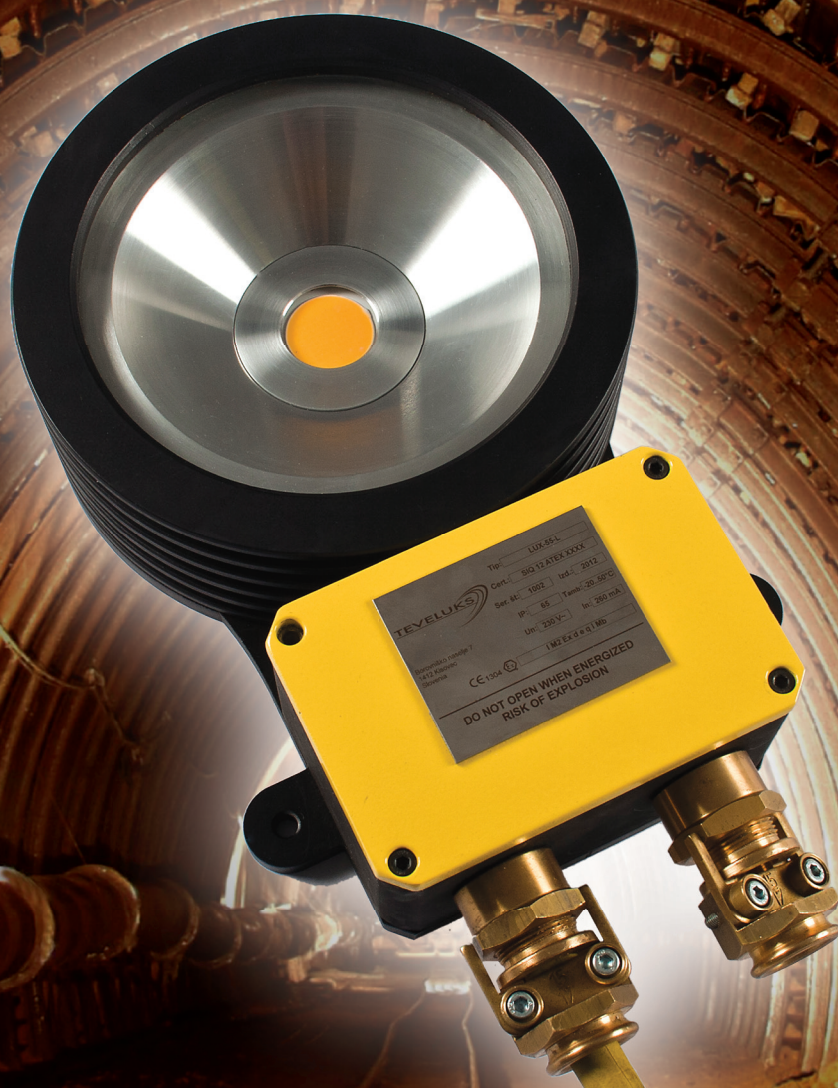

Series LUX-xx-L/x.x

SPECIFICATION	TECHNICAL SPECIFICATION
Utilizes Latest LED Technology	Lamp Type: <ul style="list-style-type: none"> • High quality LED module • In excess of 50.000 hours LED life
Wide Supply Voltage Range	
Different Color Temperatures Available	Materials: <ul style="list-style-type: none"> • Body: Powder Painted Solid Steel • Seals: Nitrile Rubber • Lamp glass: Tempered Glass
CERTIFICATION & APPROVAL	
ATEX: I M2 Ex d e I Mb	Installation / Mounting: <ul style="list-style-type: none"> • Luminaire has mounting points for M8 screws • Alternative mounting brackets are available on request
SIQ 13 ATEX 047 X	
Ambient Temperature Range: -20°C - +50°C	Cable Entries: Cable glands from 9 to 21mm cable diameter
Ingress Protection: IP65	
FEATURES & BENEFITS	Cable Connections: max. 10mm ²
Very Low Maintenance	Power Supply: 90 – 264 VAC (47 – 63Hz)
Long Life LED Module	Power Consumption: 15W – 26W
Wide Illumination Angle	Luminous flux: 1600lm – 2700lm
High Resistance to Vibration and Shock	Operating Temperature: -20°C – 50°C
Low Power Consumption	Dimensions (W x D x H): 210 x 70 x 350 mm
Operation from 90 to 264 VAC	Weight: 16kg
Low profile ideal for applications with restricted head room	  
Simple installation	
Through wiring available as standard	
3 years warranty on LED and electronics	

DIMENSIONAL DRAWINGS (mm)

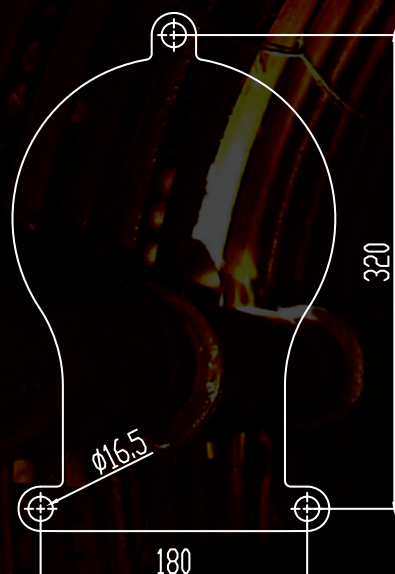

CONSTRUCTION

